

## 25GBASE-SR SFP28 850nm 100m DDM MMF Transceiver

**P/N: 6C-SFP28-SR**



### Features

- Up to 28Gbps Data Links
- Up to 100m transmission on OM4
- Power dissipation < 1W
- VSCSEL laser and PIN receiver
- Metal enclosure, for lower EMI
- 2-wire interface with integrated Digital Diagnostic monitoring
- Hot-pluggable SFP+ footprint
- Specifications compliant with SFF 8472
- Compliant with SFP+ MSA with LC connector
- Single 3.3V power supply
- Case operating temperature range: Commercial: 0°C to +70°C Industry: -40°C~85°C
- Compliant to SFF-8431
- RoHS Compliant.

### Applications

- 25G Ethernet
- Data center and Fiber channel

## I. Absolute Maximum Ratings

| Parameter            | Symbol | Min.    | Typ. | Max.    | Unit | Note |
|----------------------|--------|---------|------|---------|------|------|
| Storage Temperature  | Ts     | -40     | -    | 85      | °C   |      |
| Relative Humidity    | RH     | 5       | -    | 95      | %    |      |
| Power Supply Voltage | VCC    | -0.3    | -    | 4       | V    |      |
| Signal Input Voltage |        | Vcc-0.3 | -    | Vcc+0.3 | V    |      |

## II. Recommended Operating Conditions

| Parameter                  | Symbol           | Min. | Typ.  | Max. | Unit | Note         |
|----------------------------|------------------|------|-------|------|------|--------------|
| Case Operating Temperature | Tcase            | 0    | -     | 70   | °C   | Commercial   |
| Power Supply Voltage       | VCC              | 3.14 | 3.3   | 3.47 | V    |              |
| Power Supply Current       | ICC              | -    |       | 300  | mA   |              |
| Data Rate                  | BR               |      | 25.78 |      | Gbps |              |
| Transmission Distance      | TD               |      | -     | 100  | m    |              |
| Coupled fiber              | Multi-mode fiber |      |       |      |      | 50/125um OM4 |

**Note:** Low rate is 24~26Gb/s & High rate is 25~28 Gb/s, different rate range has different register setting, not auto-Negotiation.

## III. Optical Characteristics

| Parameter                         | Symbol      | Min  | Typ | Max   | Unit  | Ref. |
|-----------------------------------|-------------|------|-----|-------|-------|------|
| Transmitter                       |             |      |     |       |       |      |
| Output Opt. Pwr                   | POUT        | -8.4 |     | 2.4   | dBm   | 1    |
| Optical Wavelength                | $\lambda$   | 840  | 850 | 860   | nm    |      |
| Spectral Width (RMS)              | $\sigma$    |      |     | 0.6   | nm    |      |
| Optical Extinction Ratio          | ER          | 2    |     |       | dB    |      |
| RIN                               | RIN         |      |     | -128  | dB/Hz |      |
| Receiver                          |             |      |     |       |       |      |
| Rx Sensitivity                    | RSENS       |      |     | -10.3 | dBm   | 2    |
| Input Saturation Power (Overload) | Psat        | 1    |     |       | dBm   |      |
| Wavelength Range                  | $\lambda_C$ | 770  | 850 | 860   | nm    |      |
| LOS De -Assert                    | LOSD        |      |     | -13   | dBm   |      |
| LOS Assert                        | LOSA        | -30  |     |       | dBm   |      |
| LOS Hysteresis                    |             | 0.5  |     |       | dB    |      |

### Notes:

Class 1 Laser Safety per FDA/CDRH and IEC-825-1 regulations.

Measured with a PRBS 231-1 test pattern, @25.78Gb/s, BER<5e-5.


## IV. Electrical Characteristics

| Parameter                      | Symbol     | Min     | Typ | Max      | Unit     | NOTE |
|--------------------------------|------------|---------|-----|----------|----------|------|
| Supply Voltage                 | Vcc        | 3.14    | 3.3 | 3.46     | V        |      |
| Supply Current                 | Icc        |         |     | 300      | mA       |      |
| Transmitter                    |            |         |     |          |          |      |
| Input differential impedance   | Rin        |         | 100 |          | $\Omega$ | 1    |
| Single ended data input swing  | Vin,pp     | 180     |     | 700      | mV       |      |
| Transmit Disable Voltage       | VD         | Vcc-1.3 |     | Vcc      | V        |      |
| Transmit Enable Voltage        | VEN        | Vee     |     | Vee+ 0.8 | V        | 2    |
| Receiver                       |            |         |     |          |          |      |
| Differential data output swing | Vout,pp    | 300     |     | 850      | mV       | 3    |
| LOS Fault                      | VLOS fault | Vcc-1.3 |     | VccHOST  | V        | 4    |
| LOS Normal                     | VLOS norm  | Vee     |     | Vee+0.8  | V        | 4    |
| Power Supply Rejection         | PSR        | 100     |     |          | mVpp     | 5    |

### Notes:

1. Connected directly to TX data input pins. AC coupled thereafter.
2. Or open circuit.
3. Into 100 ohms differential termination.
4. Loss of Signal is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
5. Receiver sensitivity is compliant with power supply sinusoidal modulation of 20 Hz to 1.5 MHz up to specified value applied through the recommended power supply filtering network.

## V. Pin Descriptions

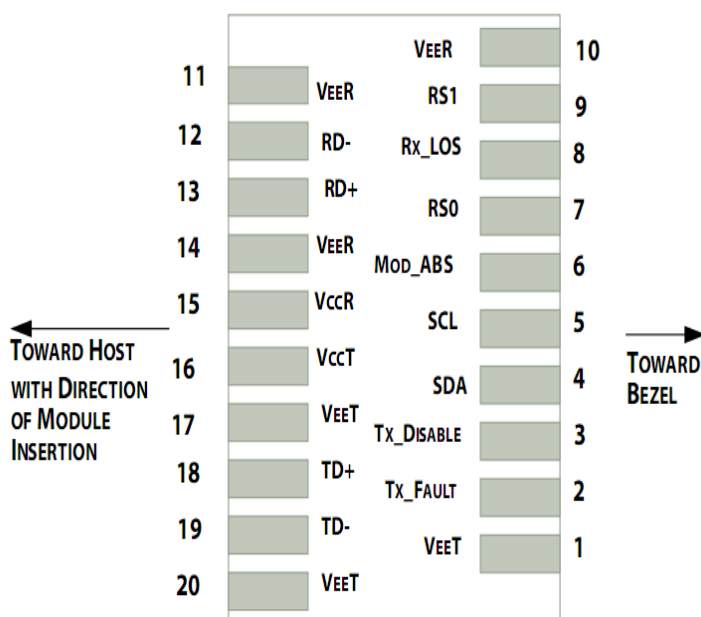

## VI. Pin Definition

| Pin | Symbol  | Name/Description                                               | NOTE |
|-----|---------|----------------------------------------------------------------|------|
| 1   | VEET    | Transmitter Ground (Common with Receiver Ground)               | 1    |
| 2   | TFAULT  | Transmitter Fault.                                             | 2    |
| 3   | TDIS    | Transmitter Disable. Laser output disabled on high or open.    | 3    |
| 4   | SDA     | 2-wire Serial Interface Data Line                              | 4    |
| 5   | SCL     | 2-wire Serial Interface Clock Line                             | 4    |
| 6   | MOD_ABS | Module Absent. Grounded within the module                      | 4    |
| 7   | RS0     | Rate Select 0                                                  | 5    |
| 8   | LOS     | Loss of Signal indication. Logic 0 indicates normal operation. | 6    |
| 9   | RS1     | No connection required                                         | 1    |
| 10  | VEER    | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 11  | VEER    | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 12  | RD-     | Receiver Inverted DATA out. AC Coupled                         |      |
| 13  | RD+     | Receiver Non-inverted DATA out. AC Coupled                     |      |
| 14  | VEER    | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 15  | VCCR    | Receiver Power Supply                                          |      |
| 16  | VCCT    | Transmitter Power Supply                                       |      |
| 17  | VEET    | Transmitter Ground (Common with Receiver Ground)               | 1    |
| 18  | TD+     | Transmitter Non-Inverted DATA in. AC Coupled.                  |      |
| 19  | TD-     | Transmitter Inverted DATA in. AC Coupled.                      |      |
| 20  | VEET    | Transmitter Ground (Common with Receiver Ground)               | 1    |

### Notes:

1. Circuit ground is internally isolated from chassis ground.
2. TFAULT is an open collector/drain output, which should be pulled up with a 4.7k $\Omega$ – 10 k $\Omega$  resistor on the host board if intended for use. Pull up voltage should be between 2.0V to Vcc + 0.3V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
3. Laser output disabled on TDIS>2.0V or open, enabled on TDIS<0.8V.
4. Should be pulled up with 4.7k $\Omega$ - 10k $\Omega$  on host board to a voltage between 2.0V and 3.6V. MOD\_ABS pulls line low to indicate module is plugged in.
5. Internally pulled down per SFF-8431 Rev 4.1.
6. LOS is open collector output. It should be pulled up with 4.7k $\Omega$  – 10k $\Omega$  on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

## VII. Ordering information

| Part Number | Product Description                                             |
|-------------|-----------------------------------------------------------------|
| 6C-SFP28-SR | SFP28, 25.78Gb/s, 850nm, MMF, 100M, LC connector, 0°C to +70°C  |
| 6C-SFP28-LR | SFP28, 25.78Gb/s, 1310nm, SMF, 10KM, LC connector, 0°C to +70°C |
| 6C-SFP28-ER | SFP28, 25.78Gb/s, 1310nm, SMF, 40KM, LC connector, 0°C to +70°C |