


FIBER OPTIC PATCH CORD SC/APC- SC/APC

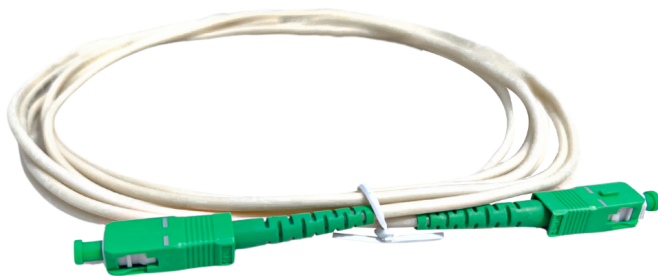

FEATURES

- Low insertion loss
- High return loss
- Excellent mechanical endurance
- Good in repeatability and exchangeability

Connector type: SC/APC (green)

Corning Bare Fiber Type: G652D / G657A1 / G657A2, PVC or LSZH jacket

Cable diameter: Ø 2.0mm / 3.0mm

Length: 3m

Color: Yellow / White

PARAMETER

Parameter	Unit	Standard & Requirement
Insertion Loss (Typical)	dB	≤0.3
Return Loss	dB	≥60(APC); ≥55(UPC)
Exchangeability	dB	≤0.2
Durability	Time	> 1000
Vibration	dB	≤0.2
Operating Temperature	°C	-40 ~ +75
Storage Temperature	°C	-45 ~ +85

APPLICATION

- Telecommunications
- FTTX
- CATV
- Optical communication system