


Model

FS108

8-Port 10/100 Mbps
Desktop Switch

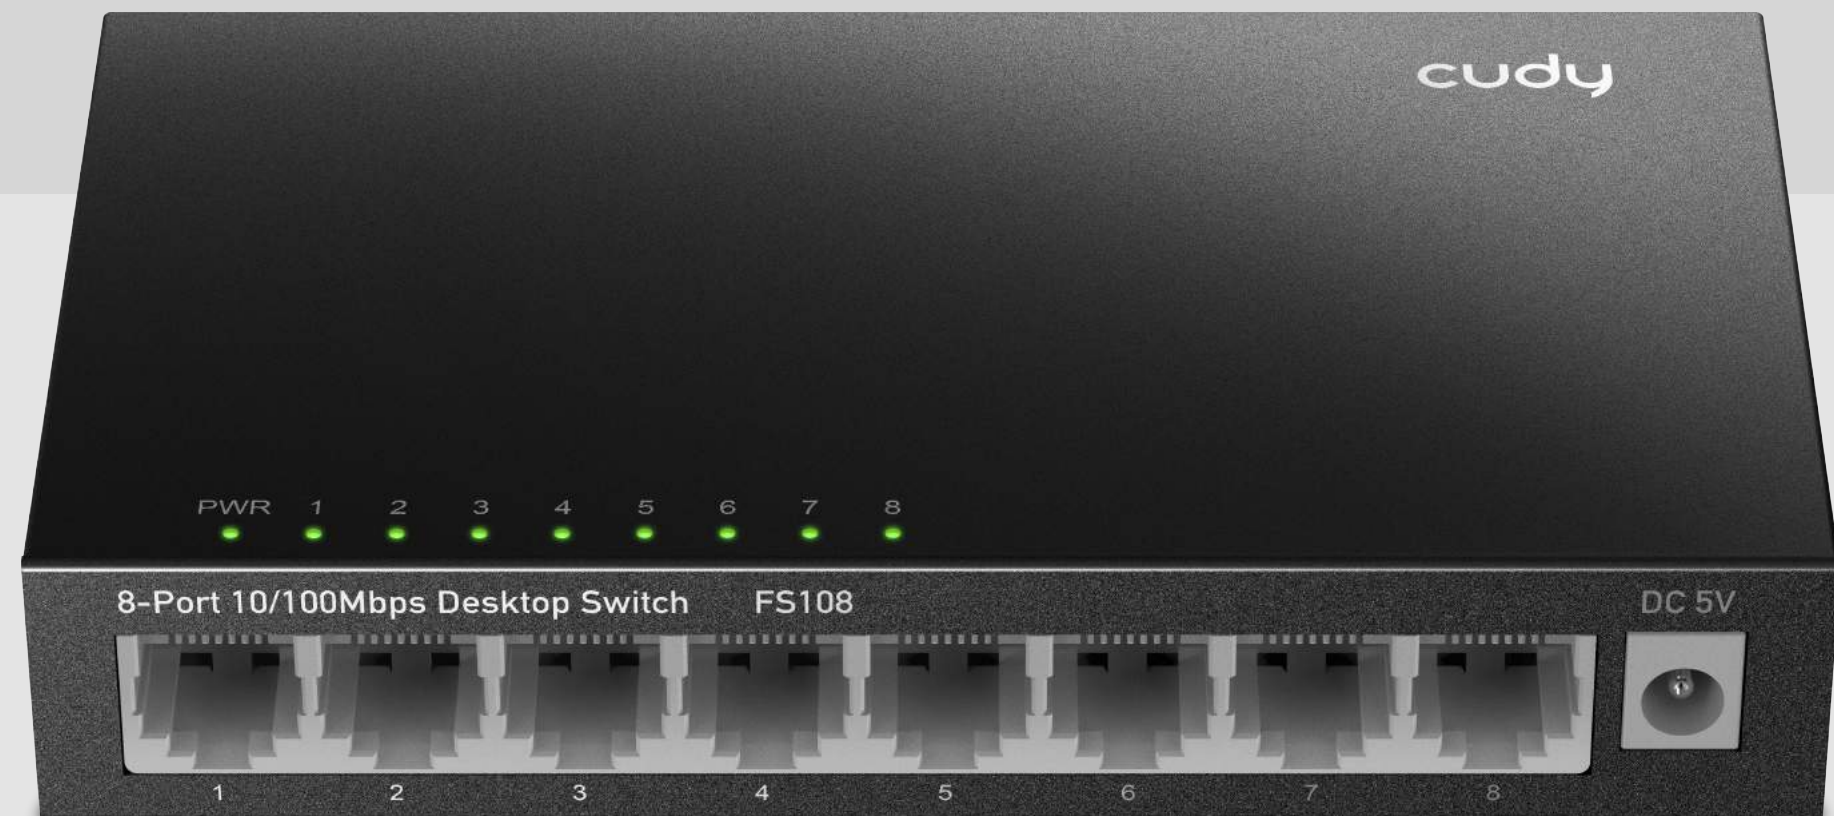

**Metal
Casing**



**Power
Saving**

[Datasheet](#)



Features

- 8× 10/100 Mbps Ethernet Ports
- Reliable forwarding with 448 Kbit packet buffer
- Super power-efficient with max 1W / idle 0.25W rating
- Non-blocking switching architecture
- Desktop and wall-mounting
- Metal casing

Specifications

Model	FS108
Standards	IEEE 802.3i/u
Ethernet	8× 10/100 Mbps Ports (Auto-Negotiation, Auto-MDI/MDIX)
Network Media	10BASE-T: UTP Cat 3 or above cable (≤100 m)
	100BASE-TX: UTP Cat 5 or above cable (≤100 m)
Transfer Method	Store-and-Forward
MAC Address Table	512
Switching Capacity	1.6 Gbps
Packet Forwarding Rate	1.1904 Mbps
Packet Buffer	448 Kbit
Power Saving	Saves power consumption when ports are idle
Power Consumption	Max 1W, Idle 0.25W
Power	DC 5 V / 0.55 A
Dimensions (W×D×H)	138×78×25 mm (5.43×3.07×0.98 inches)
Environment	Operating Temperature: 0°C~40°C
	Storage Temperature: -40°C~75°C
	Operating Humidity: 0%~100% non-condensing
	Storage humidity: 5%~95% non-condensing
Package Content	Switch, Power Adapter, Installation Guide